


products without compromise • service that satisfies • friendly, knowledgeable people

## How to Use Boeshield T-9®

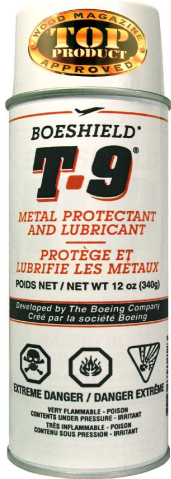

Boeshield T-9® protectant and lubricant was developed by the Boeing Company for long term metal protection. It can be used on all metal surfaces where corrosion protection and/or sliding lubrication are needed.

Boeshield T-9® is a solvent and paraffin wax based formula with over a dozen components including corrosion inhibitors. It penetrates, displaces moisture, lubricates, is waterproof, stops existing rust, exhibits excellent corrosion resisting results in salt spray exposure, and lasts for many months.

When applied, Boeshield T-9® sets to a soft, translucent, colourless, and waxy film which is not sticky, tends to shed dirt, and can be buffed to a shine. Set time varies from minutes to days depending on temperature, humidity, and thickness of coating.

Boeshield T-9® contains no harsh solvents and is safe to use around most paints, plastics, vinyls, wiring, and many glues. Because of its high dielectric it can be applied to electrical circuits, controls, and wiring. Boeshield T-9® does not require mixing, is not damaged by freezing, and shelf life is indefinite. Coverage for a single 12oz. aerosol can is over 500sq.ft. (46sq.m.).

### Industrial Use and Tool Care

For long term metal protection during tool storage apply Boeshield T-9® and allow to set. Repeat once or twice per year depending on environment and exposure.

For corrosion inhibition and sliding lubrication on tools in use, such as on a table saw surface, spray on a light coating and wipe off excess until surface appears to be dry. Be certain entire surface was whetted. Reapply weekly or more often depending on service, environment, and exposure.

Saw table tops	Blades and bits	Planer joiner	Chisels
Drill press	Hand tools	Mechanics tools	Shears

Boeshield T-9® must be reapplied to cutting edges and surfaces after use of tools to maintain corrosion inhibiting properties. Use Blade & Bit™ and Rust Free™ as necessary to clean tools prior to applying Boeshield T-9®.

### Bicycle and Motorcycle Uses

For chains and cables spray or drip on Boeshield T-9®, wipe off excess, and allow to set for at least one hour. For new chains, dip in Boeshield T-9®, squeegee off excess, and allow to set for a day or two. Spray inside tubular frames.

Road cyclists can get about 300+ miles (500Km) per application. In wet weather riding reapply after half that distance. For off road riding reapply after one quarter that distance, more frequently if conditions require. For best performance, "apply tonight, ride tomorrow".

### Aircraft Uses

Coat the interior of wings, fuselage, tail, and control surfaces. Does not add significant weight to the airframe. One US gallon of liquid is more than sufficient for a typical single engine aircraft. Boeshield T-9® is applied during the "annual" when inspection covers are removed. Reapplication is usually required in 3 to 5 years, depending on service and exposure.

Very effective for rust proofing steel tubing on fabric covered aircraft. Should be tested on the exterior skin prior to application to ensure that no degradation of the material or lap joints takes place.

### Automotive Uses

Spray liberally on underside of vehicle, under the hood, and inside panels. Boeshield T-9® stops existing rust and will not block weep holes. Overspray on body can be wiped or buffed to a shine. Boeshield T-9® will lubricate locks, hinges, window mechanisms, and other components.

### Powerboat Uses

**Above Deck** - Spray on all metal surfaces and wipe off excess:

Towers	Locks	Motor controls	Latches
Outriggers	Hatch hardware	Stanchions	Light terminals
Railings	Fuel and water covers	Hinges	Canvas snaps

**Below Deck** - Spray liberally and DO NOT wipe:

Engine exterior	Bilge pump	Thru-hull fittings	Battery terminals
Electrical panels	Steering linkage	Engine interior fogging oil	

### Sailboat Uses

**Above Deck** - Spray on all metal surfaces and wipe off excess:

Mast head sheaves	Sail slides	Stranded rigging	Head foils
Swage joints	Stanchion bases	Turn buckles	Hatch hinges
Snap shackles	Sliding hatch covers	Spinnaker pole ends	Canvas snaps

**Below Deck** - Spray liberally and DO NOT wipe:

Instruments	Engine	Electronics	Steering linkage
Running lights	Plumbing joints	Electrical connections	Bilge pump

### Uses for RVs

For most uses spray on Boeshield T-9® and allow to set, do not wipe off. Wiping is necessary only to prevent dripping where unwanted or on surfaces which require handling ;

Awning hardware	Locks and latches	Steps and linkage	Window tracks
Exposed wiring	Trailer hitches	Generators	Shower doors
Heater control cables	Electrical connectors and terminals		

### Guns and Firearms Use

**Field use** - Spray on and wipe off excess. Reapply at least weekly.

**Storage** - Spray on and allow to set, do not wipe. Repeat every six to twelve months. Re-spray lightly to soften existing material and wipe off excess when ready to use.

### Home Use

You will find many uses for Boeshield T-9® in the shop, garage, home, vehicle, office, cottage, and everywhere. Because Boeshield T-9® is so clean and does not attract dirt it is great for locks, sliding patio door rollers and tracks, squeaky hinges, storing garden tools and snow shovels, and wherever you need great metal protection and/or great lubrication. Use indoors and outdoors.

Let us know how you use Boeshield T-9®.